

DELTA VANGUARD





DELTA LOGISTICS LTD.
MARINE CONTRACTORS

- > DYNAMIC POSITION CLASS 2
- > 172 T BOLLARD PULL
- > 600 M² OPEN DECK SPACE
- > 400 T ANCHOR HANDLING/
TOWING WINCHES
- > CLEAN DESIGN/COMFORT CLASS



DELTA VANGUARD

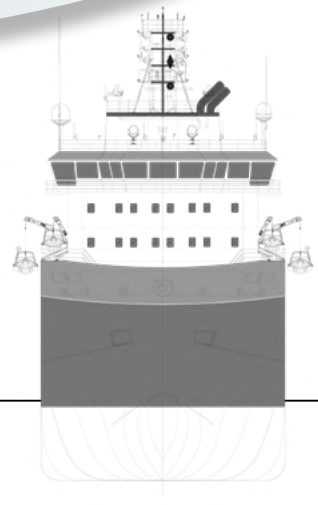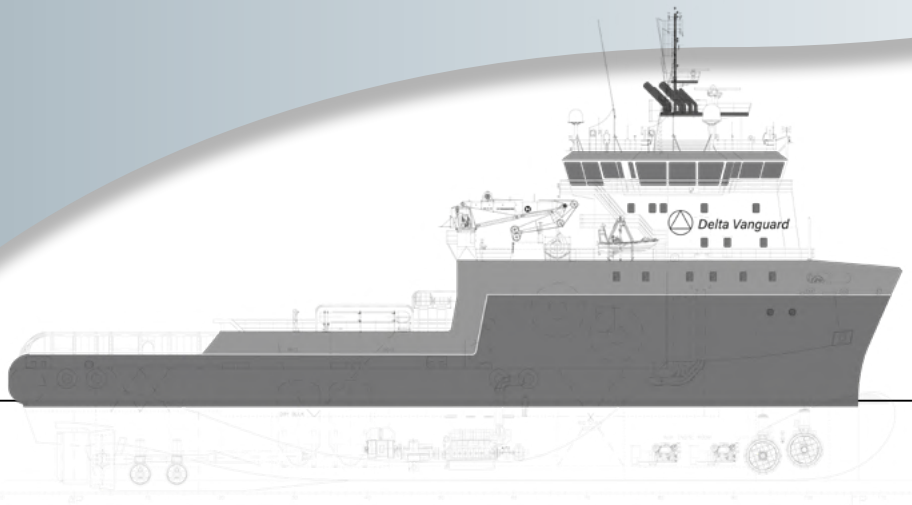

CLASSIFICATION

A1 Offshore Support Vessel (FFV 1-NS, OSR-C1, Supply, TOW), AMS, ACCU, DPS-2

Additional Notations: ENVIRO, PMP+, TCM, UWILD

Reference systems

2 x DGPS Kongsberg
1 x Fanbean Renishaw
1 x HiPAP Kongsberg
1 x Mini Radscan

Motion reference units

2 x Gyro Anschütz
2 x Wind sensor Gill
2 x Motion sensor Kongsberg

DECK EQUIPMENT

Anchor handling winch	1 x 400 t
Tow winches	2 x 400 t
Chain lockers	1 x 245 m ³ + 1 x 264 m ³
Shark jaws	2 x 700 t
Stern rollers	2 x 3.0 m x 3.0 m
Stern roller SWL	2 x 800 t
Towing pins	2 x 200 t
Capstans	2 x 15 t
Tugger winches	2 x 17 t

DIMENSIONS

Length (LOA)	73.2 m
Beam	20.0 m
Depth	9.1 m
Draft scantling	7.75 m
Deadweight	3370 t
Gross tonnage	4678

DECK CAPACITIES

Deck load capacity	1030 t
Deck strength	Aft 15 t/m ² Fwd 10 t/m ²
Free deck area	600 m ²
Length	35.8 m
Width	16.8 m

PROPULSION / BOLLARD PULL

Main engines	13872 BHP 2 x MAN 8-27/38 + 2 x MAN 7-L27/38
Thrusters	2 x CP main propellers 2 x bow tunnel 1200 BHP 2 x stern tunnel 680 BHP
Bollard pull	172 t

ACCOMMODATION

Person capacity	30
-----------------	----

TANK CAPACITIES

Base oil *	129 m ³
Brine *	769 m ³
Drill/ballast water	1800 m ³
Dry bulk	200 m ³
Fresh water	618 m ³
Fuel *	1191 m ³
Oil based mud *	640 m ³
Oil recovery *	769 m ³

Including multi-purpose tanks *

*All figures and data believed to be correct, but not guaranteed

This document is based on specifications at time of manufacture and may change without notice.
Exact capacities, deadweight cargo capacity and other relevant figures may vary upon delivery of vessel.

www.deltalogistics.net